



# QUICK SCREEN USA.

QUICKSCREEN ALUMINUM FENCING AND GATE SYSTEMS  
SPECIFICATION SHEET - FULL PRIVACY SERIES

**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Universal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

USA  
ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes  
ASTM B557 – Tension Testing of Aluminum Products  
ANSI H35.2-2017 - Tolerances aluminum extrusions

AUS  
AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes  
AS/NZS 1664 – Aluminium structures  
AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

AMMA 2604 - Finishing standard Inc  
ASTM B117 – Salt Spray (Corrosion) Testing  
ASTM D3359 – Adhesion of Coatings  
ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings  
ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**

AAMA 2604  
ASCE SEI 7-10 - Minimum design loads for buildings and other structures  
AS2159 - Soil properties for footing depths  
AS1530 - Non combustible testing in accordance with ISO 1182.2010  
Australia/NZ – AS/NZS 1530.3 D2525

**72" wide x 71" high Quickscreen Full Privacy**

- 2 x Universal posts (incl caps) (95" l)
- 12 x 6" x 5/8" T & G board (71" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (71" l)

**96" wide x 71" high Quickscreen Full Privacy**

- 2 x Universal posts (incl caps) (95" l)
- 12 x 6" x 5/8" T & G board (95" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (95" l)

**Single Gate (42" wide ) Full Privacy**

- 2 x gate frames Inc screw cover (72" l)
- 1 x Gate frame kit (4 caps and screws)
- SS304 screws HD 12G Qty
- 6 x 6" x 5/8" T & G board (71" l) - cut into two
- 1 x - 9/16" x 5/8 Horiz Cap rail (71" l)


**Double gate ( 198" wide ) Full Privacy**

- 4 x gate frames Inc screw cover (72" l)
- 2 x Gate frame kit (4 caps and screws)
- SS304 screws HD 12G Qty
- 24 x 6" x 5/8" T & G board (71" l)
- 2 x - 9/16" x 5/8 Horiz Cap rail (95" l)


# UNIVERSAL POST INSTALL METHOD



## Universal Post

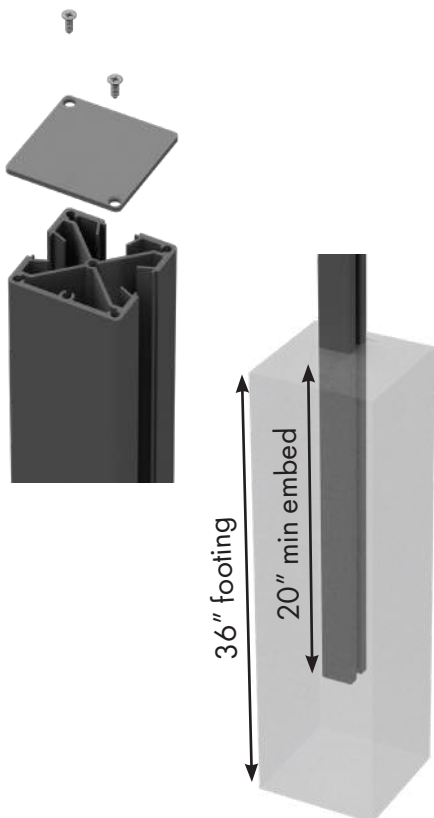

## Full Privacy Board

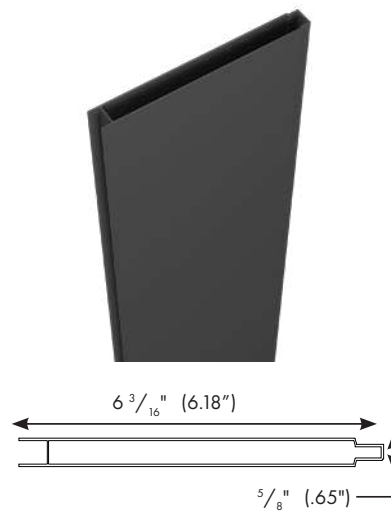

WALL THICKNESS: 14 GAUGE

F\*TU - 262MPa

5 15/16" (5.91") Coverage

## Slat Clip



## Horizontal Capping Cover

WALL THICKNESS: 14 GAUGE



**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

USA

ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

ASTM B557 – Tension Testing of Aluminum Products

ANSI H35.2-2017 - Tolerances aluminum extrusions

AUS

AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes

AS/NZS 1664 – Aluminium structures

AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

AMMA 2604 - Finishing standard Inc

ASTM B117 – Salt Spray (Corrosion) Testing

ASTM D3359 – Adhesion of Coatings

ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings

ASTM D4214 - Chalking Resistance.

**Construction and Building applications**

AAMA 2604

ASCE SEI 7-10 - Minimum design loads for buildings and other structures

AS2159 - Soil properties for footing depths

AS1530 - Non combustible testing in accordance with ISO 1182:2010

Australia/NZ – AS/NZS 1530.3 D2525

**72" wide x 71" high Quickscreen Full Privacy**

- 2 x Universal posts (incl caps) (95" l)

- 12 x 6" x 5/8" T & G board (71" l)

- 1 x - 9/16" x 5/8 Horiz Cap rail (71" l)

**96" wide x 71" high Quickscreen Full Privacy**

- 2 x Universal posts (incl caps) (95" l)

- 12 x 6" x 5/8" T & G board (95" l)

- 1 x - 9/16" x 5/8 Horiz Cap rail (95" l)



**Powder coat colors —**



**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

USA  
ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes  
ASTM B557 – Tension Testing of Aluminum Products  
ANSI H35.2-2017 - Tolerances aluminum extrusions

AUS  
AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes  
AS/NZS 1664 – Aluminium structures  
AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

AMMA 2604 - Finishing standard Inc  
ASTM B117 – Salt Spray (Corrosion) Testing  
ASTM D3359 – Adhesion of Coatings  
ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings  
ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**


AAMA 2604  
ASCE SEI 7-10 - Minimum design loads for buildings and other structures  
AS2159 - Soil properties for footing depths  
AS1530 - Non combustible testing in accordance with ISO 1182:2010  
Australia/NZ – AS/NZS 1530.3 D2525

**72" wide x 71" high Quickscreen Full Privacy**

- 2 x Universal posts (incl caps) (95" l)
- 12 x 6" x 5/8" T & G board (71" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (71" l)

**96" wide x 71" high Quickscreen Full Privacy**

- 2 x Universal posts (incl caps) (95" l)
- 12 x 6" x 5/8" T & G board (95" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (95" l)

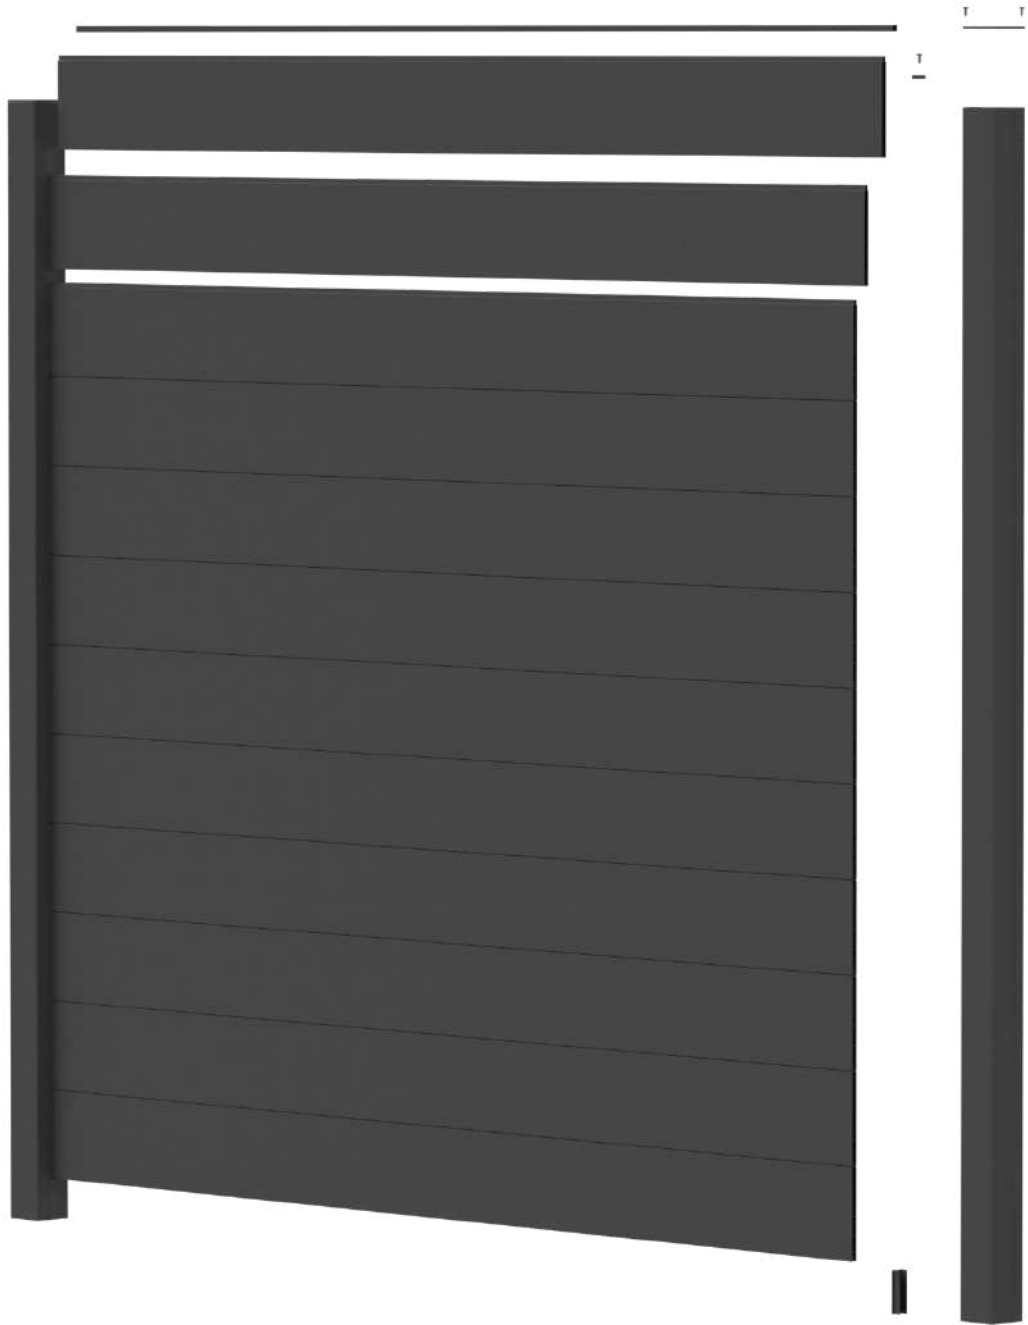

**Powder coat colors —**



**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

- USA
  - ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
  - ASTM B557 – Tension Testing of Aluminum Products
  - ANSI H35.2-2017 - Tolerances aluminum extrusions
- AUS
  - AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes
  - AS/NZS 1664 – Aluminium structures
  - AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

- AMMA 2604 - Finishing standard Inc
- ASTM B117 – Salt Spray (Corrosion) Testing
- ASTM D3359 – Adhesion of Coatings
- ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings
- ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**

- AAMA 2604
- ASCE SEI 7-10 - Minimum design loads for buildings and other structures
- AS2159 - Soil properties for footing depths
- AS1530 - Non combustible testing in accordance with ISO 1182.2010
- Australia/NZ – AS/NZS 1530.3 D2525

**72" wide x 71" high Quickscreen Full Privacy**

- 2 x Blank Post - 2 9/16" x 2 9/16" (incl caps) (95" L)
- OR Blank Post - 4" x 4" (incl caps) (95" L)
- 2 x Side Frame with Friction Insert and Top & Bottom Plates
- 12 x 6" x 5/8" T & G board (71" L)
- 1 x - 9/16" x 5/8 Horiz Cap rail (71" L)


**96" wide x 71" high Quickscreen Full Privacy**

- 2 x Blank Post - 2 9/16" x 2 9/16" (incl caps) (95" L)
- OR Blank Post - 4" x 4" (incl caps) (95" L)
- 2 x Side Frame with Friction Insert and Top & Bottom Plates
- 12 x 6" x 5/8" T & G board (95" L)
- 1 x - 9/16" x 5/8 Horiz Cap rail (95" L)


# BLANK POST WITH SIDE FRAME INSTALL METHOD



## 4" x 4" Post OR 2 9/16" x 2 9/16" Post

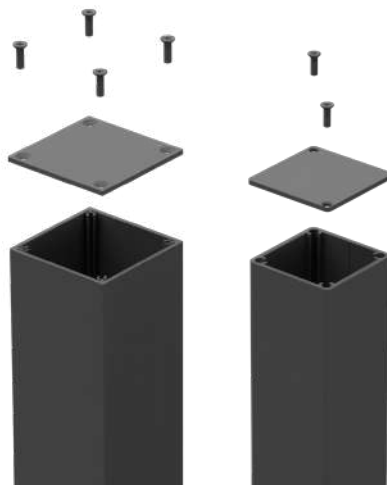

## Full Privacy Board

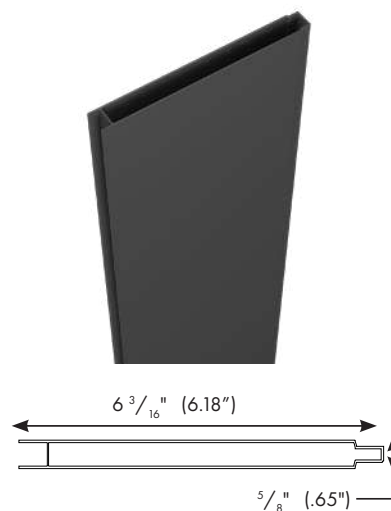

WALL THICKNESS: 14 GAUGE

F\*TU - 262MPa

5 15/16" (5.91") Coverage

## Slat Clip



## Horizontal Capping Cover

WALL THICKNESS: 14 GAUGE



### Powder coat colors —

MONUMENT

WOODLAND GRAY

PEARL WHITE

TEXTURED BLACK

**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

USA  
ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes  
ASTM B557 – Tension Testing of Aluminum Products  
ANSI H35.2-2017 - Tolerances aluminum extrusions

AUS  
AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes  
AS/NZS 1664 – Aluminium structures  
AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

AMMA 2604 - Finishing standard Inc  
ASTM B 117 – Salt Spray (Corrosion) Testing  
ASTM D3359 – Adhesion of Coatings  
ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings  
ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**


AAMA 2604  
ASCE SEI 7-10 - Minimum design loads for buildings and other structures  
AS2159 - Soil properties for footing depths  
AS1530 - Non combustible testing in accordance with ISO 1182.2010  
Australia/NZ – AS/NZS 1530.3 D2525

**72" wide x 71" high Quickscreen Full Privacy**

- 2 x Blank Post - 2 9/16" x 2 9/16" (incl caps) (95" l)
- OR Blank Post - 4" x 4" (incl caps) (95" l)
- 2 x Side Frame with Friction Insert and Top & Bottom Plates
- 12 x 6" x 5/8" T & G board (71" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (71" l)

**96" wide x 71" high Quickscreen Full Privacy**

- 2 x Blank Post - 2 9/16" x 2 9/16" (incl caps) (95" l)
- OR Blank Post - 4" x 4" (incl caps) (95" l)
- 2 x Side Frame with Friction Insert and Top & Bottom Plates
- 12 x 6" x 5/8" T & G board (95" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (95" l)

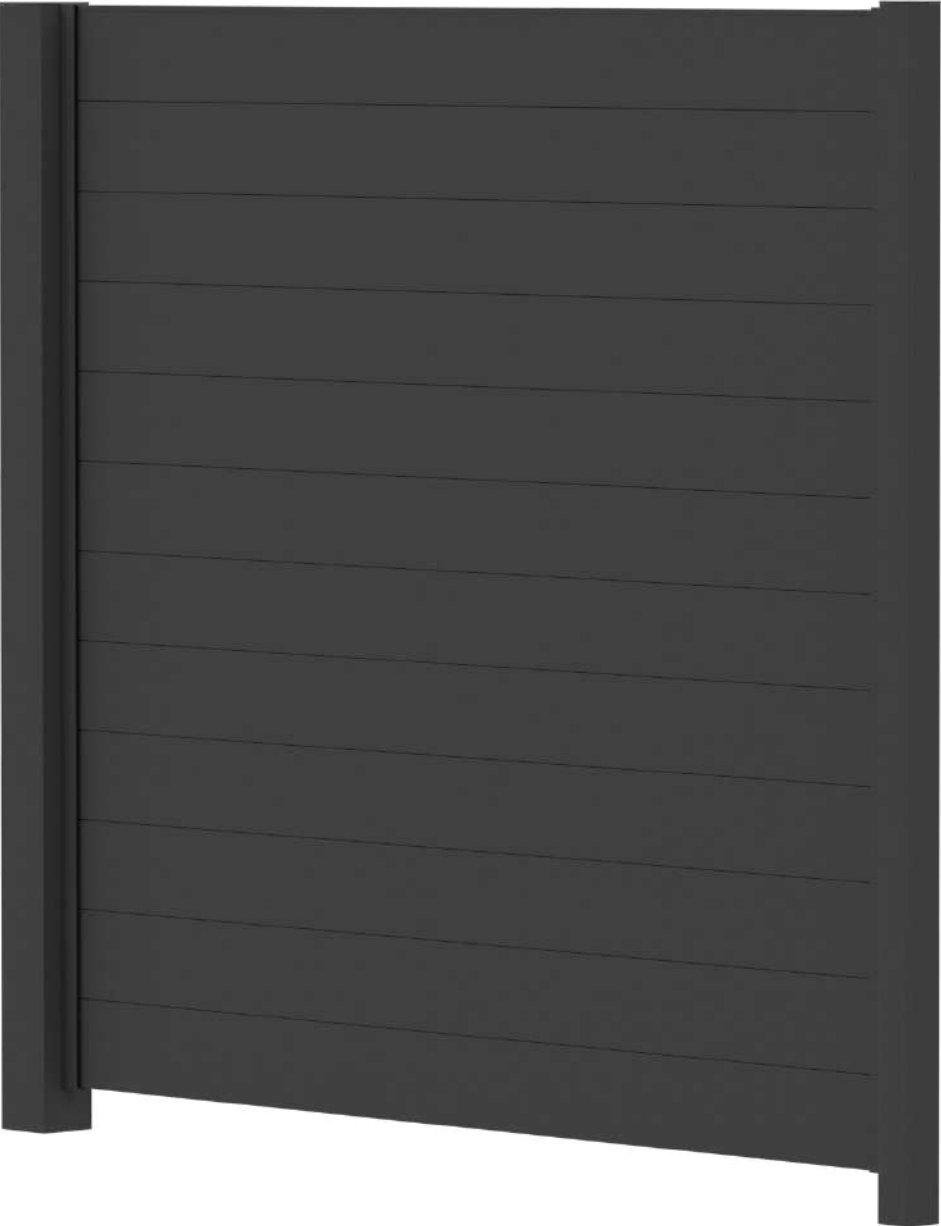

**Powder coat colors —**



**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

- USA
- ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
- ASTM B557 – Tension Testing of Aluminum Products
- ANSI H35.2-2017 - Tolerances aluminum extrusions

- AUS
- AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes
- AS/NZS 1664 – Aluminium structures
- AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

- AMMA 2604 - Finishing standard Inc
- ASTM B 117 – Salt Spray (Corrosion) Testing
- ASTM D3359 – Adhesion of Coatings
- ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings
- ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**


- AAMA 2604
- ASCE SEI 7-10 - Minimum design loads for buildings and other structures
- AS2159 - Soil properties for footing depths
- AS1530 - Non combustible testing in accordance with ISO 1182.2010
- Australia/NZ – AS/NZS 1530.3 D2525

**72" wide x 71" high Quickscreen Full Privacy**

- 2 x Blank Post - 2 9/16" x 2 9/16" (incl caps) (95" l)
- OR Blank Post - 4" x 4" (incl caps) (95" l)
- 2 x Side Frame with Friction Insert and Top & Bottom Plates
- 12 x 6" x 5/8" T & G board (71" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (71" l)

**96" wide x 71" high Quickscreen Full Privacy**

- 2 x Blank Post - 2 9/16" x 2 9/16" (incl caps) (95" l)
- OR Blank Post - 4" x 4" (incl caps) (95" l)
- 2 x Side Frame with Friction Insert and Top & Bottom Plates
- 12 x 6" x 5/8" T & G board (95" l)
- 1 x - 9/16" x 5/8 Horiz Cap rail (95" l)

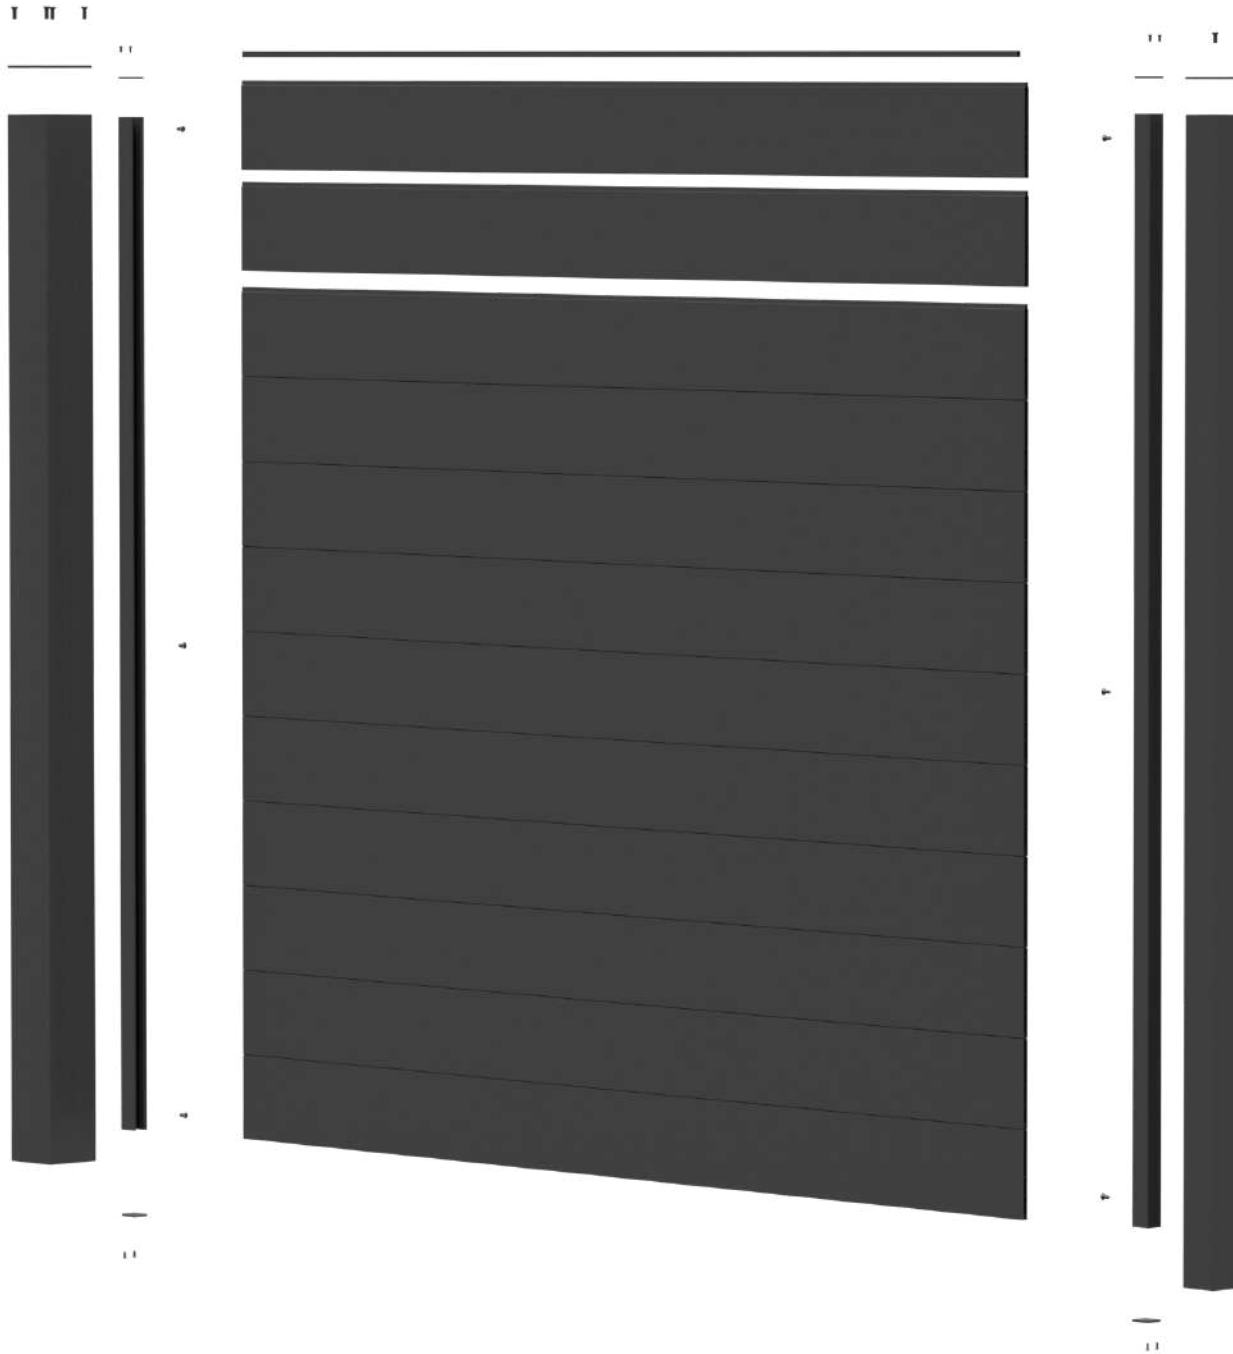

**Powder coat colors —**



**Material Specifications**

Aluminum 6005/15 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8 (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

USA  
ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes  
ASTM B557 – Tension Testing of Aluminum Products  
ANSI H35.2-2017 - Tolerances aluminum extrusions


AUS  
AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes  
AS/NZS 1664 – Aluminium structures  
AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**  
AMMA 2604 - Finishing standard Inc  
ASTM B 117 – Salt Spray (Corrosion) Testing  
ASTM D3359 – Adhesion of Coatings  
ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings  
ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**  
AAMA 2604  
ASCE SEI 7-10 - Minimum design loads for buildings and other structures  
AS2159 - Soil properties for footing depths  
AS1530 - Non combustible testing in accordance with ISO 1182.2010  
Australia/NZ – AS/NZS 1530.3 D2525

**Single Gate (42" wide ) Full Privacy**  
- 2 x gate frames Inc screw cover (72" L)  
- 1 x Gate frame kit [4 caps and screws]  
- SS304 screws HD 12G Qty  
- 6 x 6" x 5/8" T & G board [71" L] - cut into two  
- 1 x - 9/16" x 5/8 Horiz Cap rail [71" L]

# GATE OPTIONS

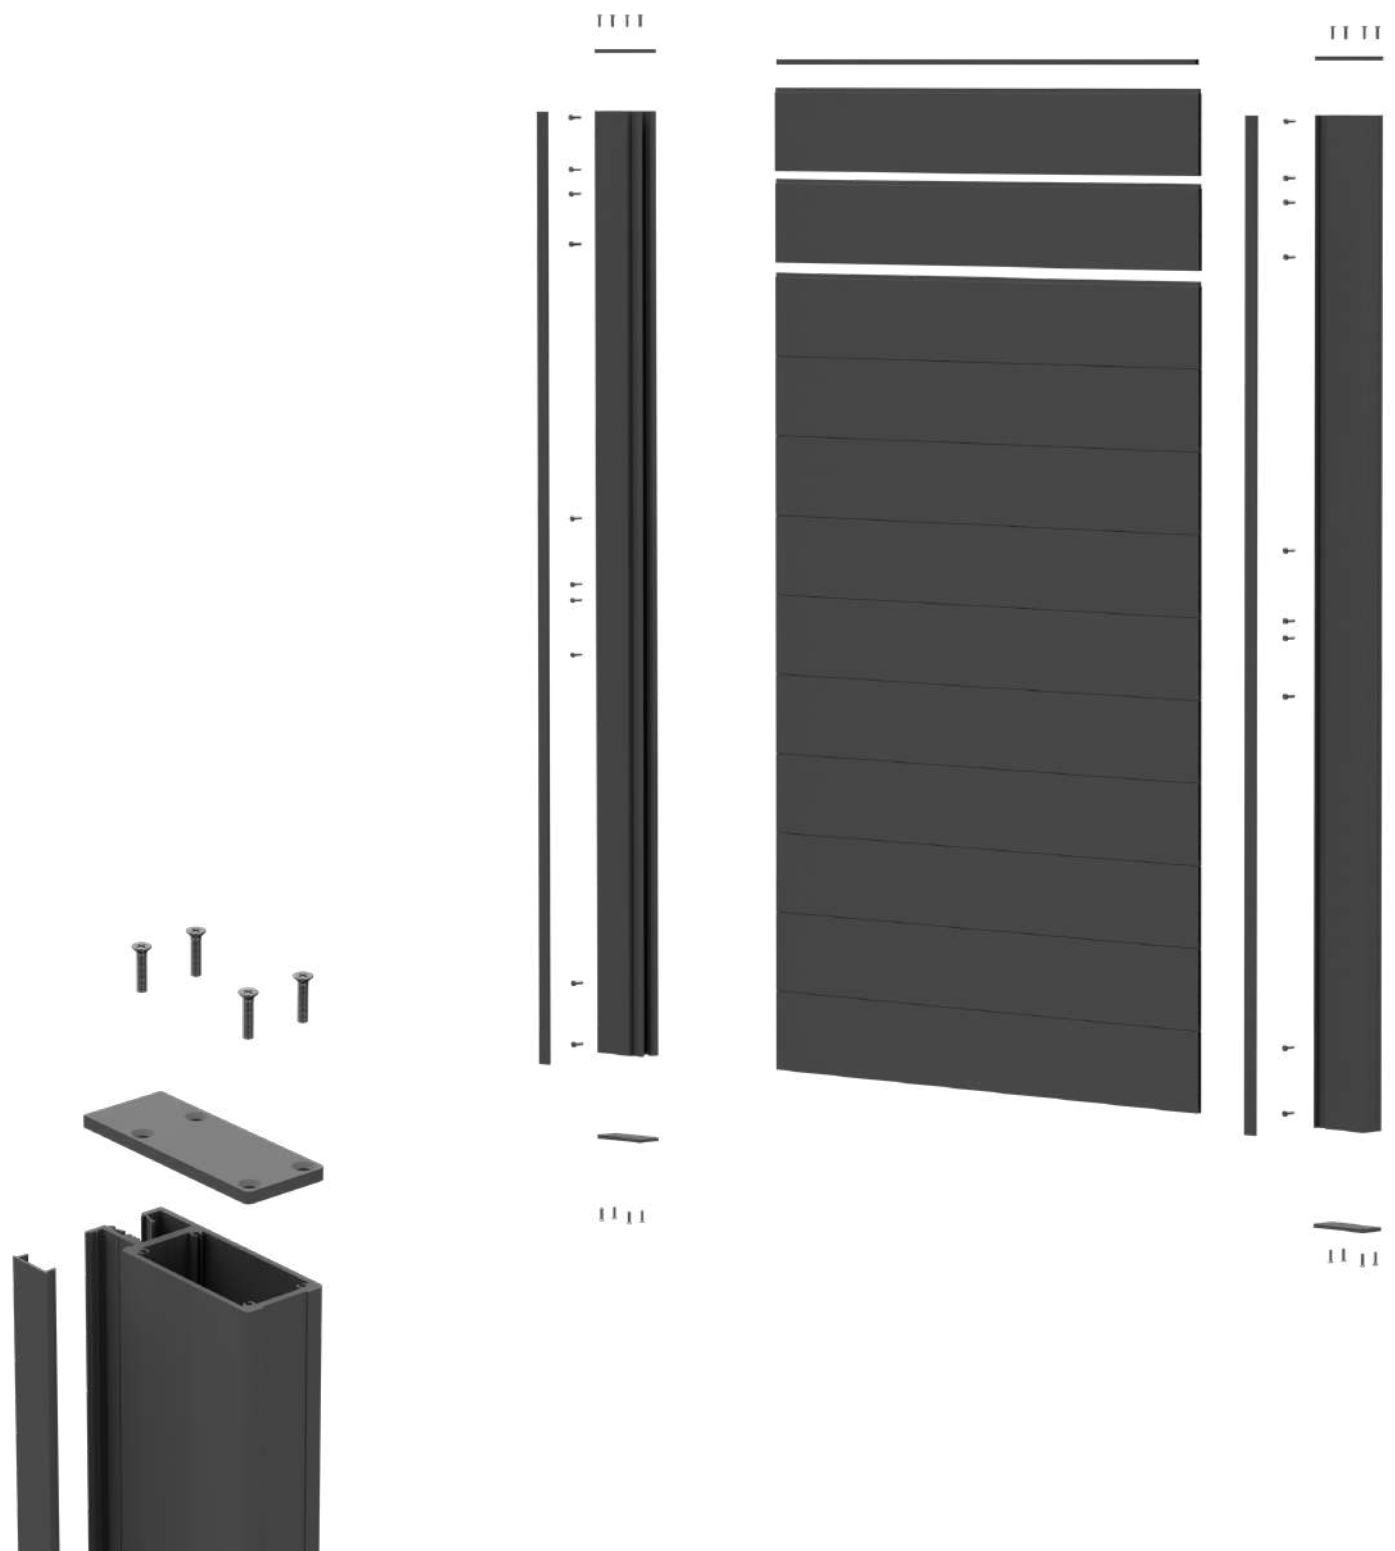

**Powder coat colors —**



**Material Specifications**

Aluminum 6005/T5 Structural grade alloy

Univesal Post - 2 9/16" x 2 9/16" (8 gauge)

T&G Board - 6" x 5/8" (14 gauge)

T & G Horizontal capping rail - 9/16" x 5/8" (14 gauge)

**All Aluminum is manufactured to US and AUS standards including:**

USA

ASTM B221 – Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

ASTM B557 – Tension Testing of Aluminum Products

ANSI H35.2-2017 - Tolerances aluminum extrusions

AUS

AS/NZS 1866 – Aluminium and aluminium alloys – Extruded rod, bar, solid and hollow shapes

AS/NZS 1664 – Aluminium structures

AS 2848.1 – Aluminium and aluminium alloys – Compositions and designation

**Coating and Finishes:**

AMMA 2604 - Finishing standard Inc

ASTM B 117 – Salt Spray (Corrosion) Testing

ASTM D3359 – Adhesion of Coatings

ASTM D1730 – Preparation of Aluminum Surfaces for Paints/Coatings

ASTM D4214 - Chalking Resistance.

**Construction and Building applications.**

AAMA 2604

ASCE SEI 7-10 - Minimum design loads for buildings and other structures

AS2159 - Soil properties for footing depths

AS1530 - Non combustible testing in accordance with ISO 1182:2010

Australia/NZ – AS/NZS 1530.3 D2525

**Double gate ( 198" wide ) Full Privacy**

- 4 x gate frames Inc screw cover (72" l)

- 2 x Gate frame kit [4 caps and screws]

- SS304 screws HD 12G Qty

- 24 x 6' x 5/8" T & G board (71" l)

- 2 x - 9/16" x 5/8 Horiz Cap rail [95" l]



**Powder coat colors —**

